


Panel cut-out

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

IEC 技术参数 IEC Technical Data		IEC61076-2-101
工作温度 Operating temperatur [°C]		-25~+80
防护等级 IP Class (IN Locked condition)		IP67
额定电压 Rated Voltage [V]		
额定电流 Rated Current [A]		
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible [mm²]		
接线范围 Wire Range 单/多芯线 Solid/Stranded [AWG]		
材料 Material		
绝缘材料 Insulation Material		PA 66
阻燃等级 Imflammability		UL94V-0
导体材料 Contactor Material		铜合金 Copper alloy
导体镀层 Contactive Coating		镀金 Gold Plated
螺母/螺丝 Connector Nut/Screw		Brass With Nickel Plated 铜镀镍
符合RoHS环保要求		

Contacts Pin 数	3Pin	4Pin	5Pin	8Pin	12Pin	17Pin
A-Coding						
Rated Current 额定电流	4A	4A	4A	2A	1.5A	1.5A
Rated Voltage 额定电压	250V	250V	60V	30V	30V	30V
Pin Size 导体直径	1.0mm	1.0mm	1.0mm	0.8mm	0.6mm	0.6mm
PART NO. 品名:	M12-A03P-ST0-M01-BQ3	M12-A04P-ST0-M01-BQ3	M12-A05P-ST0-M01-BQ3	M12-A08P-ST0-M01-BQ3	M12-A12P-ST0-M01-BQ3	M12-A17P-ST0-M01-BQ3

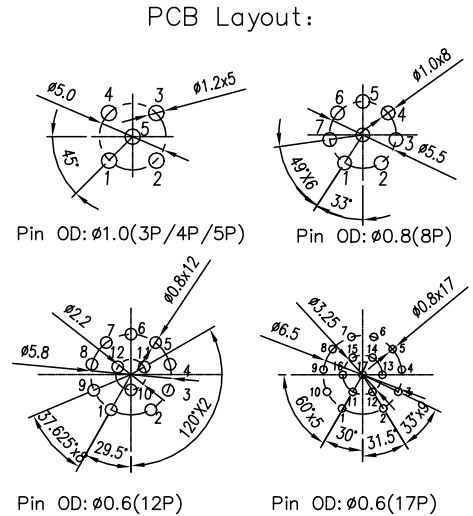

F	O-Ring	O-Ring FKM Black	pcs	1	
E	Resin	Black epoxy resin for sealing	g	2	
D	Nut	Nut: M12 X1.0, Brass With Nickel Plated	pcs	1	
C	Housing	A-Coding Male, Black PA66	pcs	1	
B	Terminal	Male Terminal, Brass With Gold Plated	pcs	X	
A	Screw	Screw M12 X1.0, Brass With Nickel Plated	pcs	1	
编号 No.	料号 Materials.No	品名 Name	材料规格 Description	单位 Unit	用量 Qty

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

NO SPECIFIED TOLERANCE		Cus' P/N:	Order No: ---	Drawing No.: SP-02-M000XX
LINEAR	0.5-6 ±0.1	DES.	Jun	DATE
	6-30 ±0.2	CHK.	DATE	UNITS mm
	>30 ±2%	APP.	DATE	SIZE A4
ANGLES	±1°			SCALE X:X

THIRD ANGLE PROJECTION
1 of 1
文件等级: 外部公开