




慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

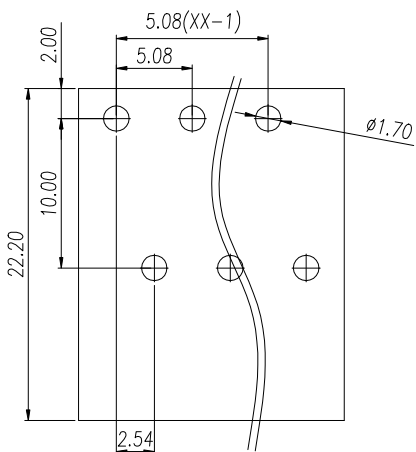


P.C.B. LAYOUT

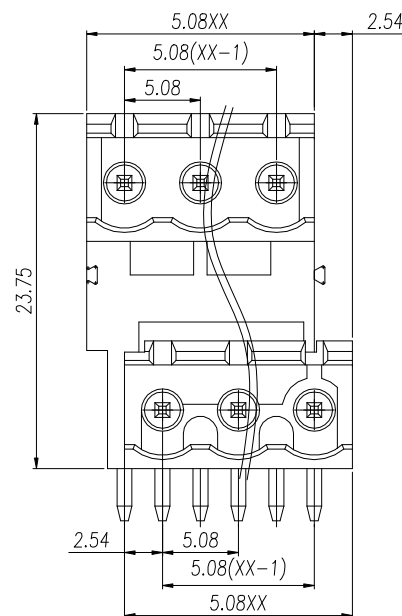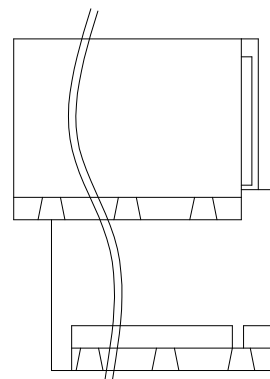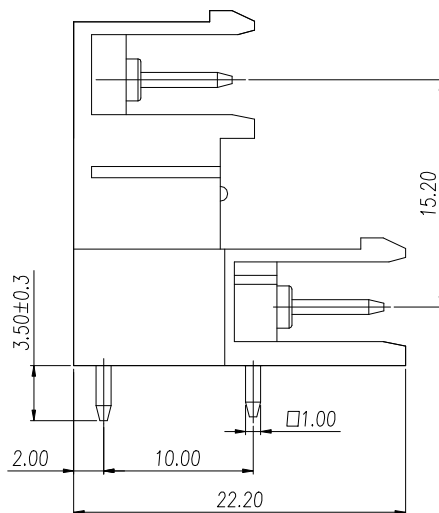

UL/CUL 技术参数 UL/CUL Technical Data					UL®	
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	15	-	10	
接线范围	Wire Range		-			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数 IEC Technical Data					IEC61984	
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	250	320	400	
额定电流	Rated Current	[A]	10	10	10	
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section		-			
硬质/柔性导线	Solid/flexible	[mm ²]				
材料					Material	
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflamability		UL94V-0			
导体材料	Contact Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀锡 Sn Plated			
一般参数					Other Data	
间距	Pitch / 极数 Poles	[mm] / [P]	5.08 / 2*2-2*24			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	-			
工作温度	Operating temperature	[°C]	-40~105			
焊锡温度	Soldering temperature		260°C/5S			
引针尺寸	Pin Dimensions	[mm]	1.0*1.0			
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.7			

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	— to 10	□ 10 to 100	⊥ 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	V0
									
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGRT-5.08-2*XXP-1YY-00		